

Olivenbohrer HSS-E

91300

Threaded drill HSS-E

mit **Dachformspitze**, Aussengewinde

Rechtslauf


Zur Bearbeitung von Kunststoffprofilen mit oder ohne Stahleinlage.

with **taper drill point**, male thread

RH-rotation

For working of UPVC profiles with or without filling steel profile

Art.-Nr.	A	B	D	E
492 050 010	10	50	87	M6 Konus/cone
488 030 010	10	30	65	M10
482 050 010	10	45	78	M8 Konus/cone
496 050 010	10	30	76	M10
480 050 010	10	50	87	M10
480 080 010	10	80	113	M10
492 050 012	12	50	87	M6 Konus/cone
482 050 012	12	45	78	M8 Konus/cone
488 030 012	12	30	65	M10
496 050 012	12	30	76	M10
480 050 012	12	50	87	M10
480 080 012	12	80	113	M10
492 050 014	14	50	87	M6 Konus/cone
482 050 014	14	45	78	M8 Konus/cone
488 030 014	14	30	65	M10
496 050 014	14	30	76	M10
480 050 014	14	50	87	M10
480 080 014	14	80	113	M10
480 050 015	15	50	87	M10

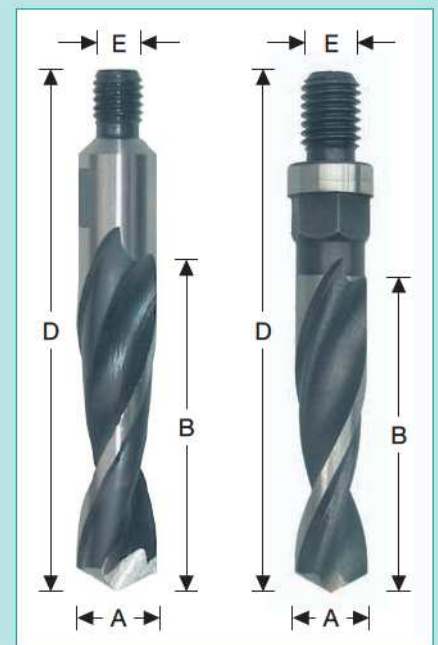

Olivenbohrer HSS-E

91301

Threaded drill HSS-E

mit **Dachformspitze**, Aussengewinde

Linkslauf

Zur Bearbeitung von Kunststoffprofilen mit oder ohne Stahleinlage.

with **taper drill point**, male thread

LH-rotation

For working of UPVC profiles with or without filling steel profile

Art.-Nr.	A	B	D	E
483 050 010	10	45	78	M8 Konus/cone
489 030 010	10	30	60	M10
497 050 010	10	30	72	M10
481 050 010	10	50	87	M10
481 080 010	10	80	113	M10
483 050 012	12	45	78	M8 Konus/cone
489 030 012	12	30	60	M10
497 050 012	12	30	72	M10
481 050 012	12	50	87	M10
481 080 012	12	80	113	M10
483 050 014	14	45	78	M8 Konus/cone
489 030 014	14	30	60	M10
497 050 014	14	30	72	M10
481 050 014	14	50	87	M10
481 080 014	14	80	113	M10

